




Samsung Galaxy Prevail 2 Vibrator Replacement

If for any reason you need to replace your phone's vibration motor, this guide will show you how.

Written By: Garrett Bowleg

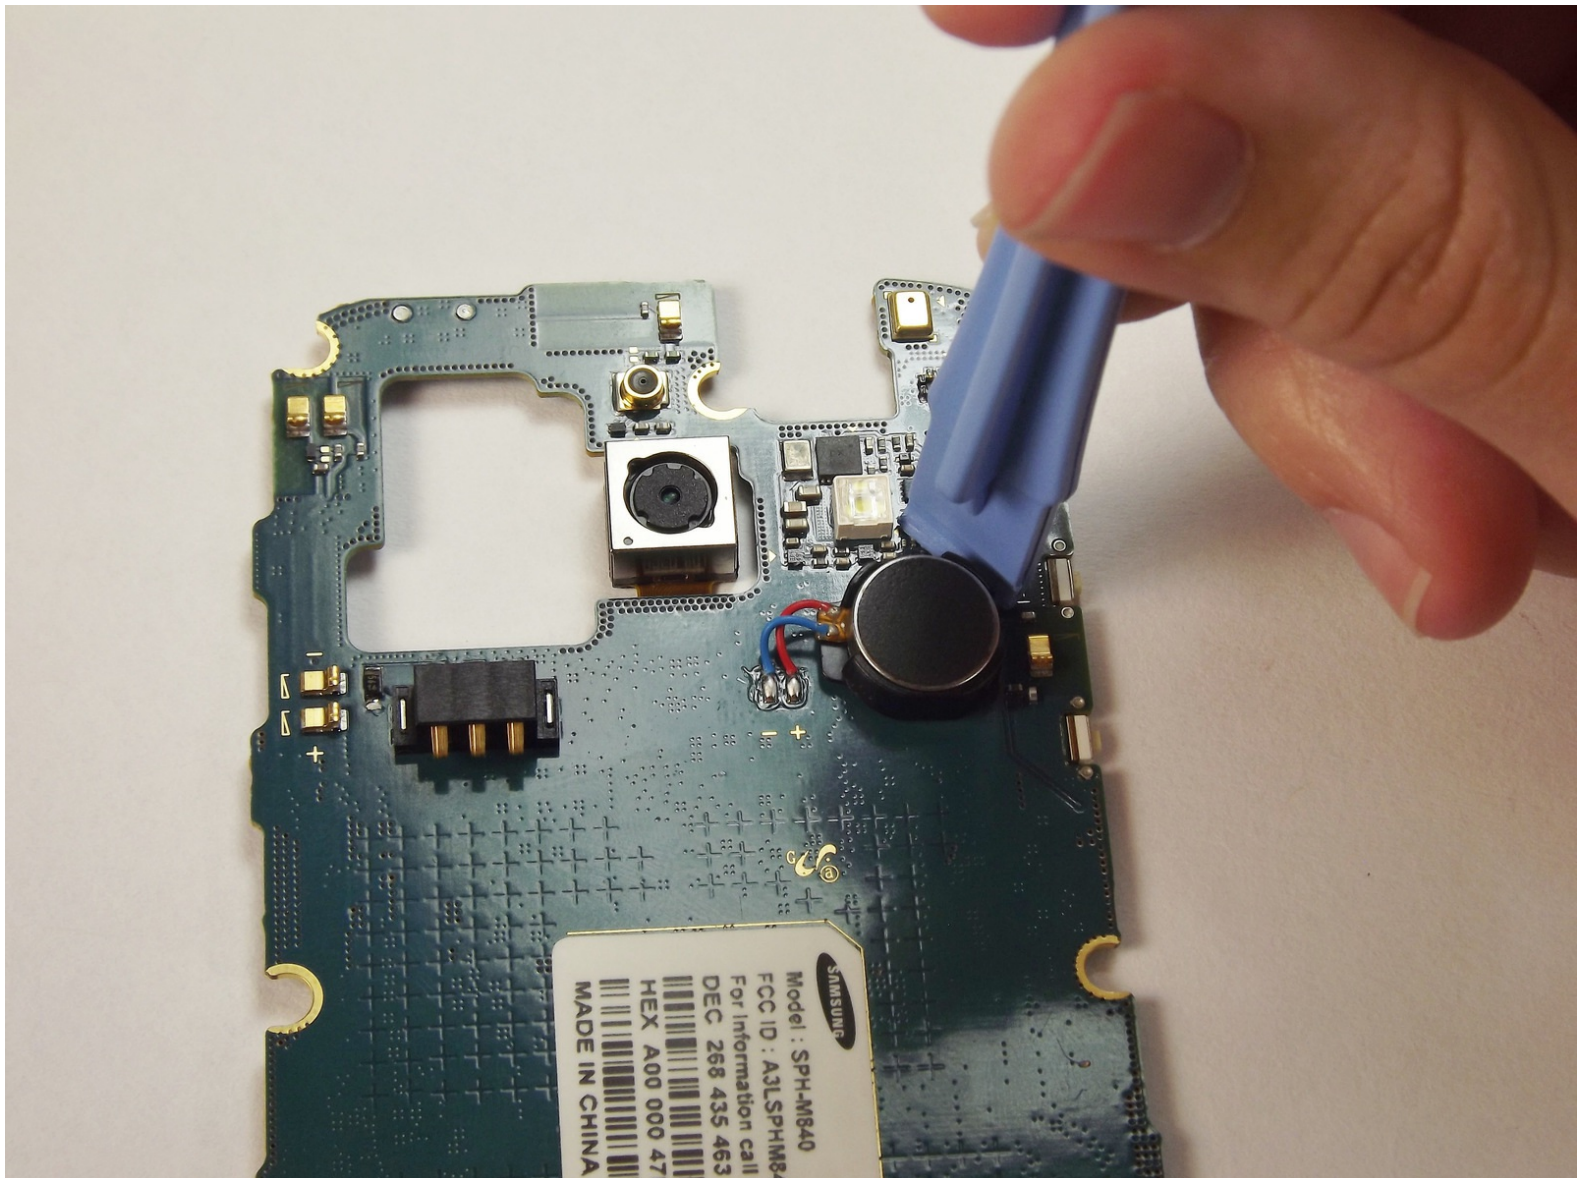

INTRODUCTION

This guide will teach you how to replace the vibration motor of the Samsung Galaxy Prevail 2. Prior knowledge of how to use a soldering iron is required.



TOOLS:

- [Spudger](#) (1)
 - [Soldering Station](#) (1)
-

Step 1 — Removing Back Casing



- Using your finger nails or the spudger; pry the plastic casing open, and pull away from the body of the phone.

Step 2 — Remove Battery



- Gently pull the battery out of the phone.

Step 3 — Remove Screws





- Unscrew all of the screws.
- ⓘ Be sure to set the screws aside in a safe place.

Step 4 — Pry Off Back of Phone






- Insert the plastic prying tool between the silver frame and the white face of the phone. to pry off the front frame.
- ⓘ Make sure to pry around the entire frame to loosen it before proceeding.
- Use your thumbs to separate the motherboard from the back of the phone.

Step 5 — Open the Motherboard

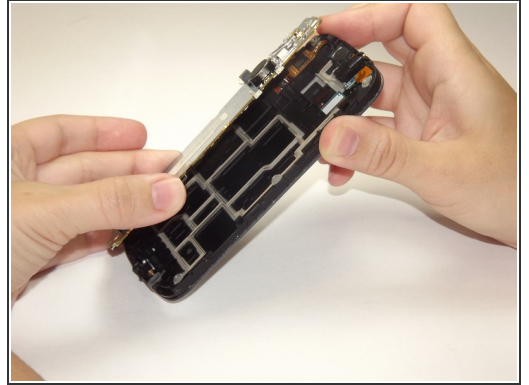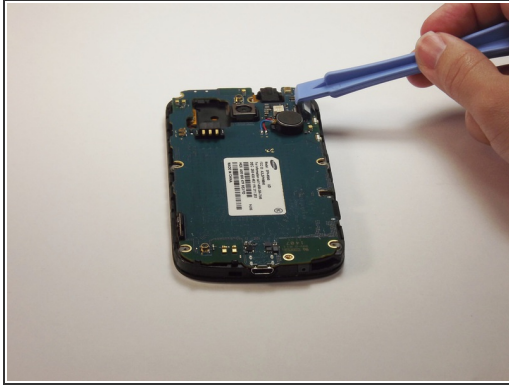


- With the plastic prying tool, lift up the flap in order to fully open the motherboard.




Step 6 — Detach Motherboard

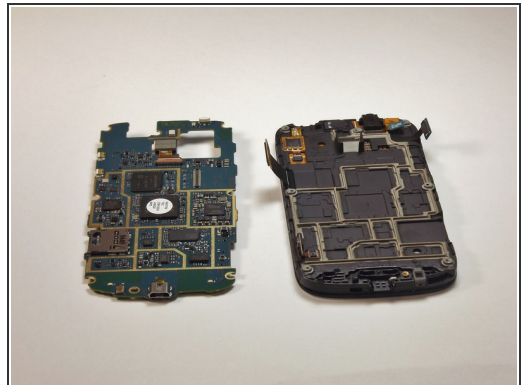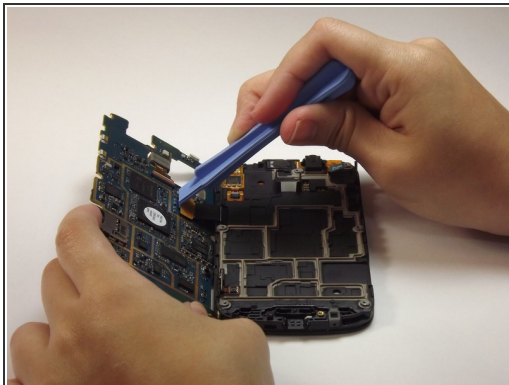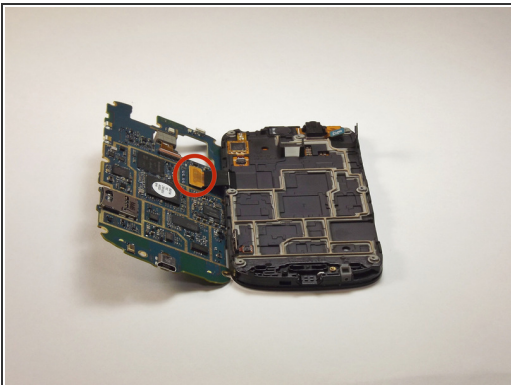

- With plastic prying tool, lift the flap up to divide the motherboard.


 This will make it easier to detach the internal battery.

Step 7 — Locate and Release Vibration Motor

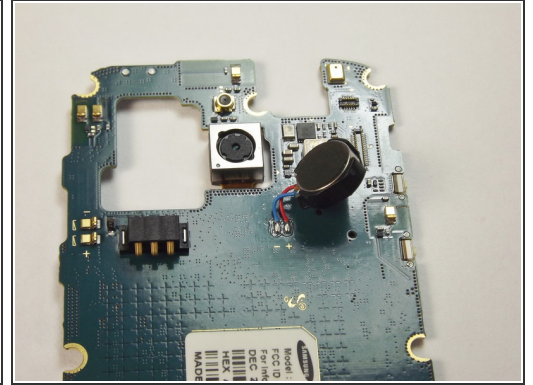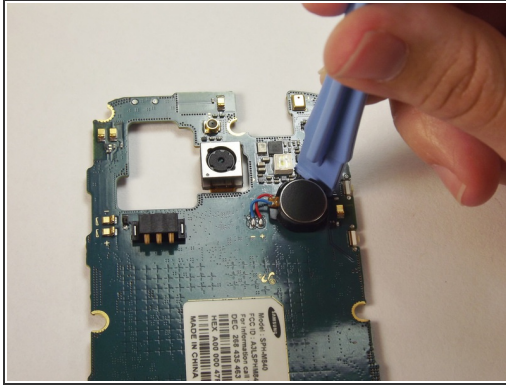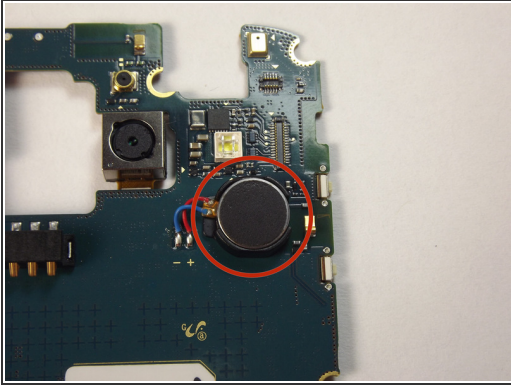

- With plastic prying tool, lift up the vibration motor.

Step 8 — Detach Vibration Motor

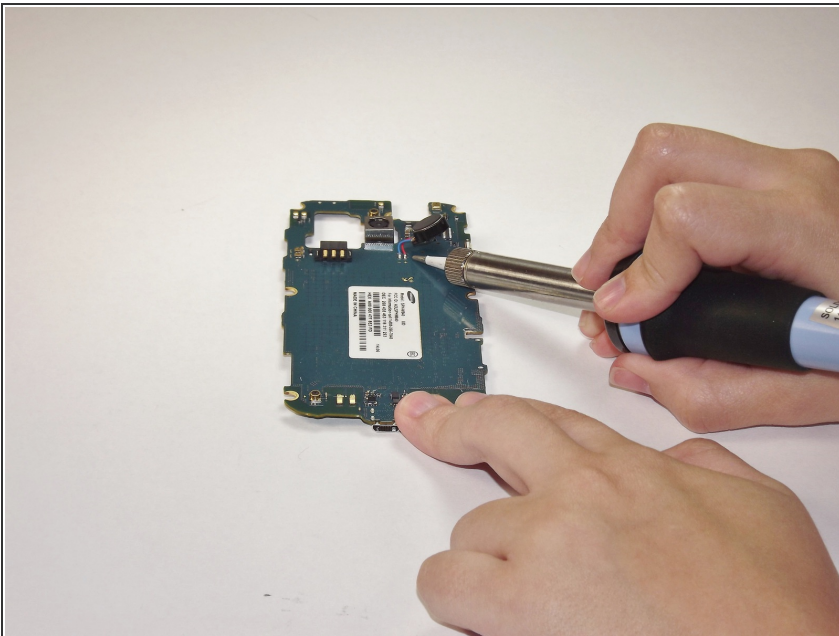

- With the soldering iron remove the solder attaching the vibration motor to the motherboard.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-14 12:55:09 AM.